


# L Terminal Shunt Resistors

## Preliminary version

LT shunts are highly accurate manganin resistance D.C. shunts. These shunts are designed for standard current measurement of electric equipment.

When a current is passed through the shunt a proportional millivolt output is produced. These are compact but have excellent long-term stability, low emf and low TCR. Our standard range of L shunts can be current rated from 5A to 500A with 50mV to 100mV output

Applications include: Measuring current in D.C. and can also be used in control devices such as power supplies and battery chargers for overload protection

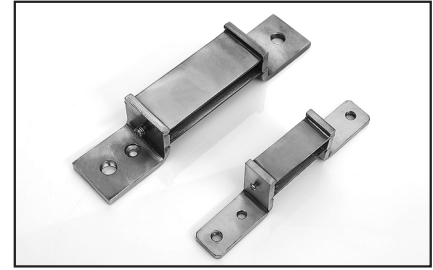

## GENERAL SPECIFICATIONS


Model	Rated Current [A]	Output Voltage [mV]	Resistance Value [mΩ]	Tolerance [%]	TCR(ppm/°C) (+20°C to +150°C)
LT50	50	100	2.0000	B[±0.1%] C[±0.25%] D[±0.5%] F[±1.0%]	Max.±30 ppm/°C
LT75	75		1.3333		
LT100	100		1.0000		
LT120	120		0.8333		
LT150	150		0.6666		
LT200	200		0.5000		
LT300	300		0.3333		
LT400	400		0.2500		
LT500	500		0.2000		

\*Also available in extended output voltage range of 50mV to 100mV, Please ask RARA for more info on this.

## CHARACTERISTICS

Operating temperature	+20°C to +150°C
-----------------------	-----------------

## DIMENSIONS [mm]

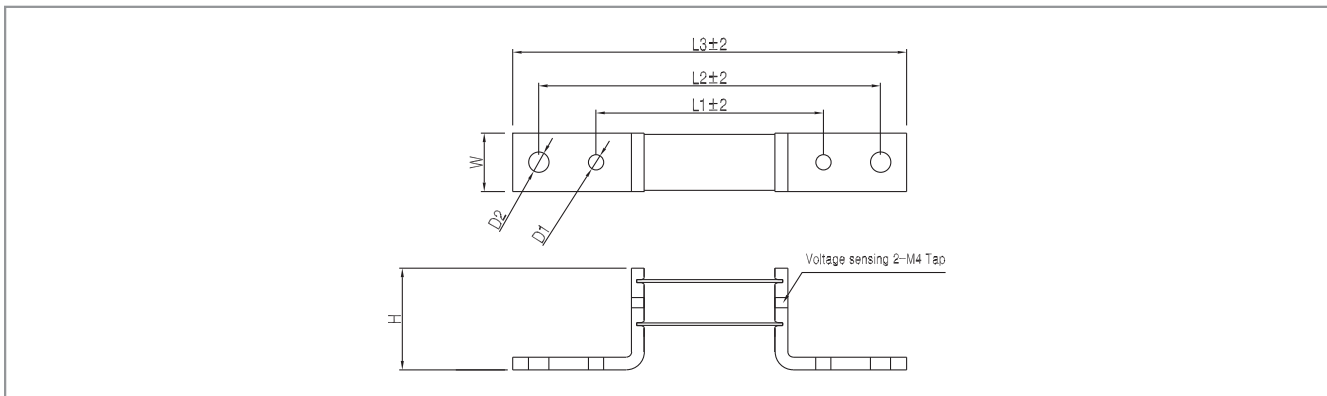

Model	L1±2	L2±2	L3±2	H	W	D1	D2
LT50-150	78	107	127	Max.35	Max.30	4,3Φ hole	M6 Tapped hole
LT200-300	120	165	185	Max.45	Max.35	4,3Φ hole	M6 Tapped hole
LT400-500	130	175	200	Max.50	Max.55	6,3Φ hole	M8 Tapped hole

## ORDERING PROCEDURE EXAMPLE

