



## TYPE DG Precision wire wound potentiometer

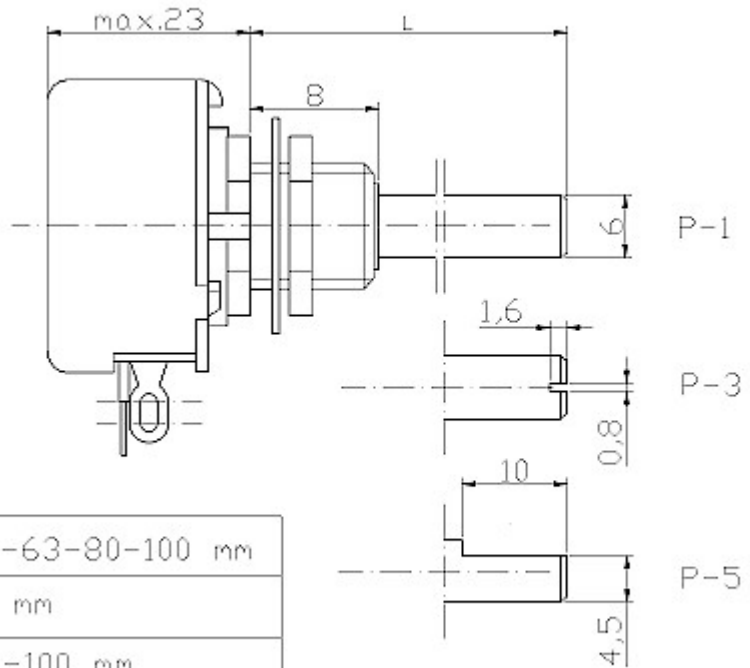

**Description:**

<b>Climatic category:</b>	<b>25/085/04</b>
<b>Power:</b>	<b>2 W</b>
<b>Rated resistance:</b>	<b>22 – 33 – 47 – 68 – 100 – 150 – 220 – 330 – 470 Ω 680 – 1000 – 1500 – 2200 – 3300 Ω</b>
<b>Resistance tolerance:</b>	<b>R ≤ 100 Ω ± 10 %, R &gt; 100 Ω ± 5 % or ± 10 %</b>
<b>Voltage limit:</b>	<b>750 V AC</b>
<b>Mechanical angle:</b>	<b>310°</b>

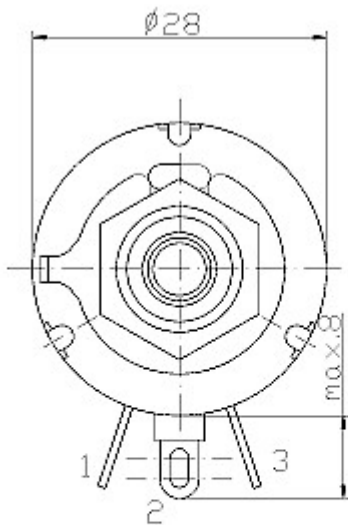

P-1	L	16-20-25-32-40-50-63-80-100 mm
P-3	L	12-16-20-25-32-40 mm
P-5	L	25-32-40-50-63-80-100 mm

**Packing:**

The potentiometers are supplied in bulk backing in a plastic bags and in a carton box.