

# RQR15, RQR20, RQR40 Ceramic Encased Resistors

RQR15 network resistors are cement encased components comprising three resistors in one. They have a low cost and are extremely easy to install. The main applications for these are PCB Boards and networks



## GENERAL SPECIFICATIONS


Model	Rated Power [W]	Resistance Range[Ω]	Tolerance [%]	
RQR15A	30W	0.01 ~ 30	<p>RQR15C</p> <p>RQR40C</p>	
RQR15L	15W	30 ~ 54K		D[±0.5]
RQR15C	5W x3	0.01 ~ 18K		F[±1.0]
RQR20	20W	0.01 ~ 20K		G[±2.0]
RQR40	40W	0.01 ~ 54k		J[±5.0]
RQR40L	40W	10 ~ 54K		K[±10]
RQR40C	10W x3	0.01 ~ 18K		

## CHARACTERISTICS

Values in [] mean Change in Ω After Test

Test	Condition
Temperature Range	- 55 ~ +155°C
Insulation Resistance	20MΩ minimum
Dielectric Strength	AC1500V for 1min (Max leakage current : 2mA)
Temperature Coefficient	Max ± 260ppm/°C

## DIMENSIONS [mm]

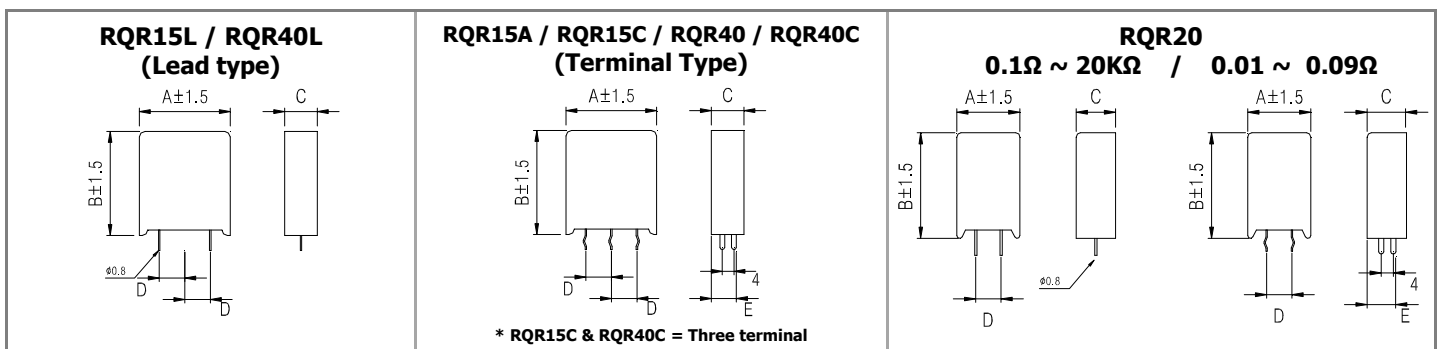

Model	Dimensions [mm]				
	A±1.5	B±1.5	C±1	D(±0.6)	E±1
RQR15	33	38	12	9.5	9
RQR20	22.5	37.5	14	9	11
RQR40	33	54	12	9.5	10