



Space Heaters

CE Certifications SPECIFICATIONS

Model	Max Rated Power [W]			Resistance Range [Ω]	Frequency [Hz]
	220V	230V	240V	*AC220 – 240V	
RSHT50	42	45	50	1152 ~ 1267	50Hz – 60Hz
RSHT60	50	55	60	960 ~ 1056	
RSHT80	67	73	80	720 ~ 792	
RSHT100	84	91	100	576 ~ 634	
RSHT120	100	110	120	480 ~ 528	
RSHT150	126	137	150	384 ~ 422	
RSHT200	168	183	200	288 ~ 317	




*CE Certification : Marking Only 220~240V

Non-CE GENERAL SPECIFICATIONS

Model	Max Rated Power[W]	Resistance Range [Ω]					Voltage Rating[V]	Frequency [Hz]
		AC110V	AC120V	AC220V	AC230V	AC240V		
RSHT50	50	242~266	288~317	968~1065	1058~1164	1152~1267	AC110~	50Hz –
RSHT60	60	202~222	240~264	807~886	881~969	960~1056		
RSHT80	80	151~166	180~198	605~665	661~727	720~792		
RSHT100	100	121~133	144~158	484~532	529~582	576~634		
RSHT120	120	100~110	120~132	403~443	440~484	480~528		
RSHT150	150	80~87	96~105	322~354	352~387	384~422		
RSHT200	200	60~66	72~79	242~266	264~290	288~317		
RSH50	50	242~266	288~317	968~1065	968~1065	1152~1267	AC240	60Hz
RSH60	60	202~222	240~264	807~886	881~969	960~1056		
RSH80	80	151~166	180~198	605~665	661~727	720~792		
RSH100	100	121~133	144~158	484~532	529~582	576~634		
RSH120	120	100~110	120~132	403~443	440~484	480~528		
RSH150	150	80~87	96~105	322~354	352~387	384~422		
RSH200	200	60~66	72~79	242~266	264~290	288~317		
RSH300	300	40~44	48~52	161~177	176~194	192~211		
RSH400	400	30~33	36~39	121~133	133~145	144~158		
RSH500	500	24~26	29~32	97~106	106~116	115~126		

SURFACE TEMPERATURE INCREASE VERSUS POWER LOAD / Marking Example

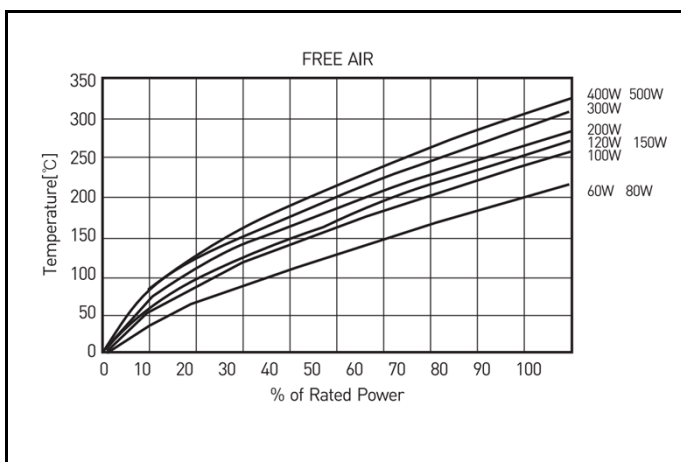

CE Certification Marking

CE SPACE HEATER **RARA** RSHT50W
AC220~240V 50/60Hz XX

Non - CE Marking

SPACE HEATER **RARA** RSHT50W
AC220V 50/60Hz XX

DIMENSIONS[mm]

Model	L1±2	L2±2
RSHT50	151	135
RSHT60	201	185
RSHT80	201	185
RSHT100	217	200
RSHT120	234	217
RSHT150	262	245
RSHT200	280	263
RSH50	127	110
RSH60	177	160
RSH80	177	160
RSH100	192	175
RSH120	209	192
RSH150	237	220
RSH200	255	238
RSH300	267	249.5
RSH400	317	299.5
RSH500	387	369.5

RSHT50-200

RSH50-200

RSH300-500